

DESIGN OF OUTER HOOD PANEL OF LOCAL COMPACT SUV TO ACHIEVE BETTER PEDESTRIAN SAFETY USING FINITE ELEMENT MODELING

Binyamin^{1*}, Tri Widodo Besar Riyadi^{2*} and Agus Dwi Anggono^{3*}

^{1,2,3}Postgraduate Program of Mechanical Engineering, Universitas Muhammadiyah
Surakarta, Pabelan, PO Box 57102, Surakarta, Indonesia.

*Email: bin290@ums.ac.id, Tri.Riyadi@ums.ac.id, ada126@ums.ac.id

ABSTRACT

Traffic accidents are terrible scourge that occurs in many countries. Especially for developing countries, where transportation affairs like tangled yarn. Besides functioning as an engine compartment cover, the hood of modern compact SUV can also help manage the impact energy of a pedestrian's head in a vehicle-pedestrian impact. This paper presents a compact SUV outer hood design that has a potential to improve hood's ability and also to absorb the impact energy of a pedestrian's head. The developed methodology for the design of a hood configuration aims to provide a robust design and homogeneous HIC for impact position at WAD 1000 and three different thicknesses (1,25 mm, 1,35 mm & 1,50 mm) of outer hood panel of local compact SUV, taking into consideration the limited space available for deformation. The non-linear Finite Element Analysis (FEA) software ANSYS (Expilic Dynamics) was used in this research to simulate the ANCAP for child pedestrian head impact testing procedurs. The results show that a minimum of deformation space and meet the requirement for HIC value where required to obtain robust and homogeneous head impact performance. Moreover, hood thickness and materials as main factors to influence stress and HIC value. Finally, from all models, magnesium alloy (NL) (1,25 mm) was selected as the best models which has greatly improved up to 29,46% for the pedestrian safety.

Keywords: Head impact; HIC; outer hood panel; FEA; pedestrian protection.

INTRODUCTION

Traffic accidents are terrible scourge that occurs in many countries. Especially for developing countries, where transportation affairs like tangled yarn. The latest data released by the World Health Organization (WHO) shows India ranks first country with the highest number of deaths caused by traffic accidents, while Indonesia reported an increase in the number of traffic accidents by more than 80 percent, the death toll from traffic accidents reached 120 people per day [1]. In those days, the belief was that the only way to reduce pedestrian fatalities and injuries was to prevent pedestrian-vehicle collisions. Several previous researchers [2]-[6] proposed improvements of hood panel based on pedestrian head protection which hood designs and materials created in finite element model. Explicit dynamics of FEM have proved to be useful for sheet metal simulation [7]. Consideration of modification of vehicle design for pedestrian protection was not an option at that time. From this sequence of events, it can be stated that

typically the colliding vehicle runs under the pedestrian and the severity of injuries vastly depend on the vehicle shape and certain characteristics such as energy absorption. In the ANCAP (Australian New Car Assessment Program), the pedestrian tests are carried out to estimate head and leg injuries to pedestrians struck by a vehicle at 40 km/h or (approx. 11,1 m/s) [8]. However, the mechanism of injury is complex.

The Head Injury Criterion (HIC) indicates a measure of the likelihood of head injury arising from an impact, which is evaluated by the impactor in terms of the simulation of child head. HIC includes the effects of head acceleration and the duration of the acceleration [5]. The impacts of standard child and adult headforms to these five different designs have been simulated in this study. ANSYS, an explicit finite element code was used to simulate the impacts. At first, the development and validation of numerical child headform impactors based on ANCAP standards are discussed. Subsequently this impactor was used for head to hood impact analysis. In addition, an implicit finite element code was developed to perform analysis for comparing the deformation, equivalent stress and HIC of three different materials.

ANCAP (Figure 1.) provide measures for the assessment of pedestrian protection performance of a passenger car experimentally by firing subsystem impactors representing a child head, adult head, upper leg and lower leg at a specified angle and speed to the front end of a stationary vehicle. The resulting injury measures from these physical tests are assessed against the bounds specified by the protocols shown in Figure 1. This study focuses only on child pedestrian head impact to the outer hood panel and do not include inner hood, upper or lower leg impacts defined in these protocols.

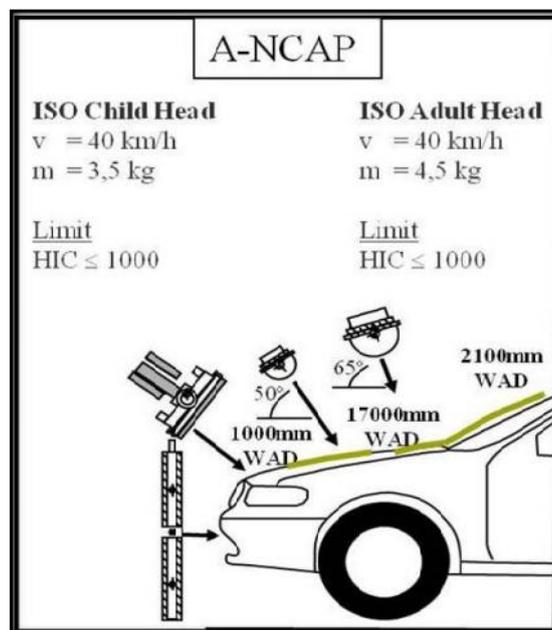


Figure 1. Standards of ANCAP pedestrian protection head impact requirements [8]

As a result of the implementation of these regulations, vehicle manufacturers face technical challenges associated with the investigation of optimal hood panel configuration to meet the requirements of ANCAP while retaining or maximising styling flexibility with minimal modifications to the general architecture of the design.

HIC criteria are used to predict the risk of engine hood to the pedestrian of collision and the level of severity of engine hood design when the collision occurs [9]. The value of HIC depends on the engine hood design, materials, impactor type and structure. HIC is calculated according to equation [10]:

$$\text{HIC} = \left[\frac{1}{t_2 - t_1} \int_{t_1}^{t_2} a \, dt \right]^{2.5} (t_2 - t_1) \quad (1)$$

where:

a is the resultant acceleration in g

t_1, t_2 is two time instants in seconds

which define the start and end of the recording when HIC is at maximum. Values of HIC in the time interval t_1-t_2 is greater than 15 ms are ignored for the purpose of calculating the maximum value. In this study, HIC value is calculated using DIAdem for the pedestrian head impact on automotive hoods.

MODELING OF CHILD HEADFORM AND OUTER HOOD PANEL

Details and properties of Child Headform

The child headform made from aluminum alloy and polyethylene, which is a homogenous construction in a spherical shape. The sphere covered with $14 \pm 0,5$ mm thick synthetic skin (polyethylene). The outer skin indicated by V_1 , the inner aluminum part V_2 and the cover plate V_3 (see Figure 2.). From Figure 2., the diameter of the cylinder on which the accelerometers were positioned was 20 mm, and its height 24 mm; the diameter of the hole on cover plate was 28 mm, and its depth was 10 mm; the thickness of the outer synthetic skin was 14 mm; the radius of the whole headform was 82,5 mm, and radius of the inner aluminum sphere was 68,5 mm. The outer skin is made of polyethylene (PE) with density 930 kg/m^3 (see Table 1.). The inner part and the cover plate are made of aluminum with a density of 2700 kg/m^3 (see Table 2.).

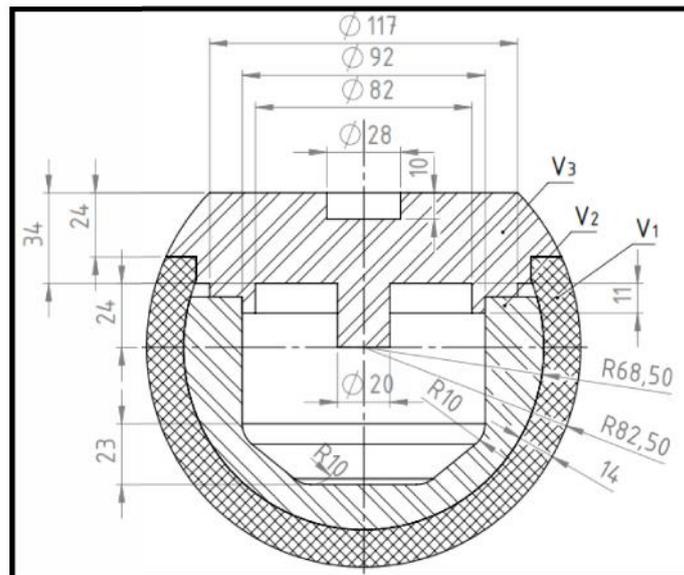


Figure 2. Detail of child headform impactor

The inner part and cover plate of child headform were aluminum alloy, which is extremely stiff compared to its polyethylene skin. Numerical model of child headform was created in Solidworks 2014 and considered as a rigid body element as shown in Figure 3.

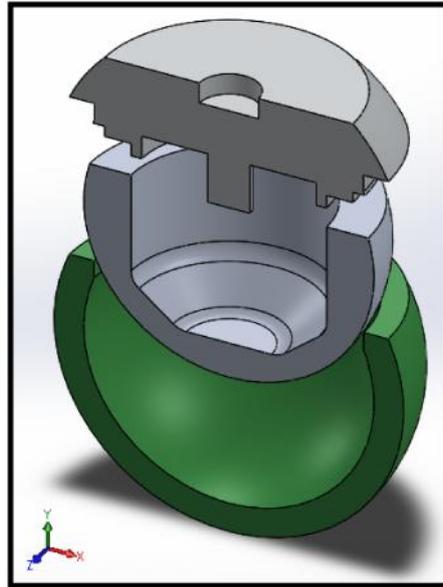


Figure 3. Numerical model of child headform

It can be seen that at Table 1. and Table 2. shows that details of material properties which used for designing childhead impactor mainly consist of aluminum alloy and polyethylene.

Table 1. Properties of headform material (outer skin)

Property	Value	Property	Value
Shear modulus	379,4 MPa	Density	930 kg/m ³
Bulk Modulus	1983,7 MPa	Specific Heat	2300 J/kg.°C
Young's Modulus	1070 MPa	Foam thickness	14 mm
Poisson's ratio	0,4101		

Table 2. Properties of headform material (inner aluminum and cover plate)

Property	Value	Property	Value
Shear modulus	26,7 GPa	Density	2770 kg/m ³
Bulk Modulus	69,6 GPa	Specific Heat	875 J/kg.°C
Young's Modulus	71 GPa		
Poisson's ratio	0.33		

The detail properties of structural steel, aluminum alloy and magnesium alloy (non linier) were created by ANSYS/ Explicit Dynamics as shown in Table 3. Structural Steel properties of the upper structure are approximated using the information prescribed by the manufacturer's company. Density, Poisson coefficient and Young module of this steel are 7850 kg/m^3 , 0,3 and 166,7 GPa, respectively.

Table 3. Properties of outer hood panel

Material	Property	Value	Property	Value
Structural Steel	Shear modulus	76,9 GPa	Density	7850 kg/m^3
	Bulk Modulus	166,7 GPa	Specific Heat	434 J/kg.°C
	Young's Modulus	200 GPa		
	Poisson's ratio	0,3		
Aluminum Alloy	Shear modulus	26,7 GPa	Density	2770 kg/m^3
	Bulk Modulus	69,6 GPa	Specific Heat	875 J/kg.°C
	Young's Modulus	71 GPa		
	Poisson's ratio	0,33		
Magnesium Alloy (NL)	Shear modulus	16,7 GPa	Density	1800 kg/m^3
	Bulk Modulus	50 GPa	Specific Heat	1024 J/kg.°C
	Young's Modulus	45 GPa	Yield Strength	193 MPa
	Poisson's ratio	0,35	Tangent Modulus	920 MPa

Design optimization was used to create a matrix using the variables specified in Table 4. This matrix was utilised to create a range of alternative outer hood designs by varying the values of the selected design parameters. The variables considered in this study are summarised in Table 1. Tolerances otherwise known as noise factors, that might have some influence on the resulting HIC value and deformation of outer hood panels, have not been considered in this optimisation study for simplicity.

Table 4. Varibales considered in design optimization

Variable	Value/Number of Variable	Type of Variable
Outer hood gauge	1,25 mm, 1,35 mm and 1,50 mm	Continuous
Materials selection	3	Discrete

Analysis of Pedestrian Protection Property

According to the requirements of the Australian New Car Assessment Program (ANCAP) for pedestrian protection, it need to define zones of car hood for analysis, as shown in Figure 4. It can be noted that when the collision projection point locates between WAD 1000 and WAD 1500, the head type will use the children head type. The adult head type will be used while the collision projection point locates between WAD 1700 and WAD 2100. In current study, the collision projection point located at WAD 1000 when the children head type will be used.

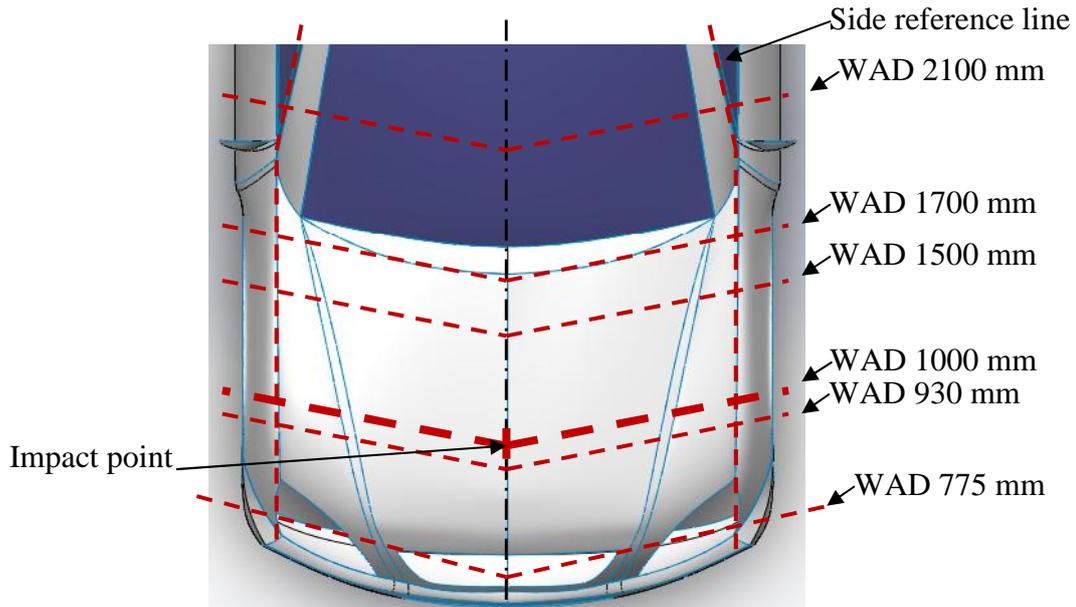


Figure 4. Zoning of pedestrian head impact protection for ANCAP

Parameter Diagram

The parameter diagram as shown in Figure 3. outlines the relationship between input and output parameters.

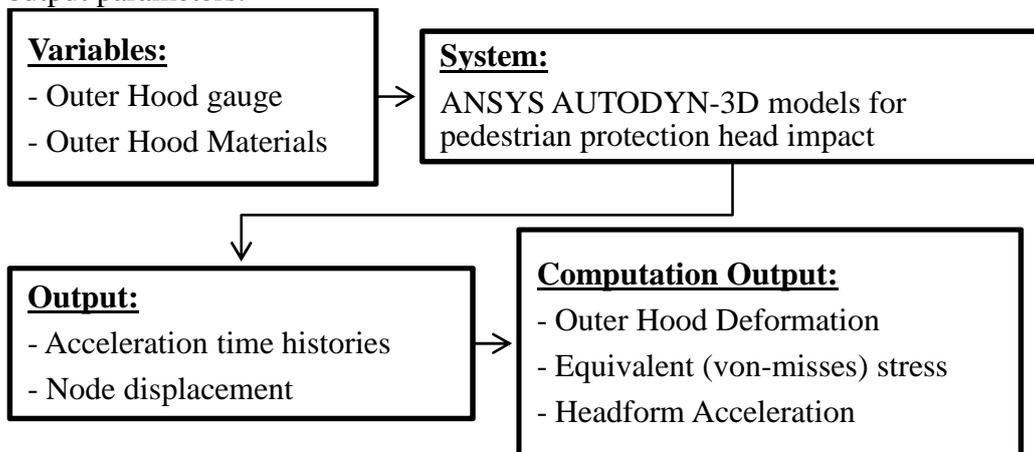


Figure 5. Paameter Diagram

Finite Element Modeling

The identification of relevant optimisation parameters, the methodology used to create three dimensional geometric models and FE models, as well as the development of optimisation methodology are presented in this paper such as child headform impactor model, equivalent stress models, deformation models and headform acceleration models. The finite element model of head impactor should be validated before utilizing.

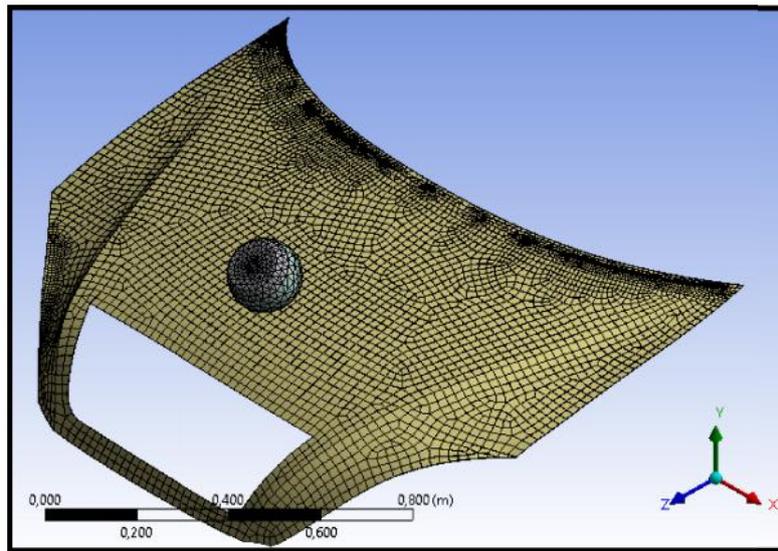


Figure 6. Finite element models of outer hood panel with child headform

All of the layers were discretized using the S4R elements (4-node general-purpose shell, reduced integration with hourglass control, finite membrane strains). The numbers of nodes and elements used in different outer hood thickness for details are shown in Table 5. The headform part is describes as a solid shape in ANSYS/Dynamics Explicit, where the number of the elements was 16623. Due to the poor of aspect ratio of these elements, a reasonably finest mesh was required to ensure convergence. Finite element models of the outer engine hood (see Table 5) was created by ANSYS/Dynamics Explicit were simulated with S4R shell element. The number of elements for outer hood panel (1,25 mm, 1,35 mm and 1,50 mm) were 5370, 5347 and 6373 respectively.

Table 5. The number of nodes and elements used in the modeling of child headform and outer hood parts.

Parts	Number of nodes	Number of elements
Inner headform	2411	10825
Cover plate	1144	4971
Skin (PE)	293	827
Outer hood panel (1,25 mm)	5506	5370
Outer hood panel (1,35 mm)	5501	5347
Outer hood panel (1,50 mm)	6519	6373

Boundary Condition (BC)

Having the headform models ready, the simulation of test process was the next step. Due to nonlinearity of the behavior of material and contact between surfaces, convergence of analysis in software was a time-consuming issue. Consequently sometimes new mesh generation and contact property changes were needed. A child headform impactor is acceptable when at any point of its surface the peak values of acceleration to be located within acceptable boundary. Boundary condition of the outer hood and headform in three areas: headform velocity, headform fixing and hood edges fixing in Figure 7. The headform impactors were impacted with the outer hood panel at previously mentioned velocity and direction, which are conducted through predefined field in ANSYS/Dynamics Explicit. For impact position at WAD 1000 from front grounded (see Figure 4).

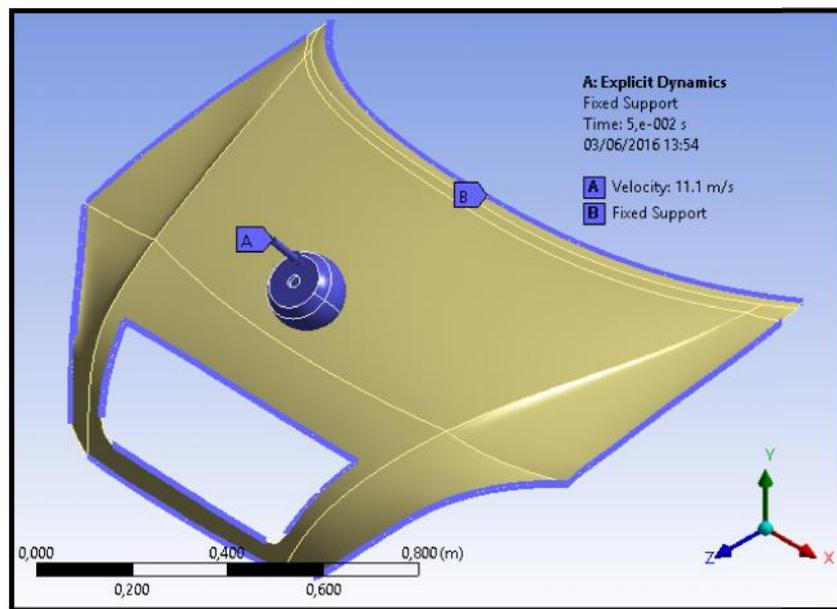


Figure 7. Boundary condition of outer hood panel and child headform

RESULTS AND DISCUSSION

Deformation of Outer Hood Panel

In this section, pedestrian head impact simulations were investigated by using three materials selection, which consist three difference thicknesses. The effect of structure plate thickness on deformation, equivalent stress, and HIC value were investigated. Some photos of deformation pattern of outer hood panel for aluminum alloy (1,25 mm) as shown in Figure 8 which were occurring in the child headform impact area (WAD 1000) starting from $t = 5,0003E-004$ to $1,5E-002$ sec. The effect of panel thickness has a significant role on the deformation value. The value of displacement varied according to material properties and thickness that indicated to the occurrence of the deformation which occurs in the outer hood panel after the impact.

It has been observed that magnesium alloy (NL) (1,25 mm) stacking squence shown highest deformation among all the models (Figure 8), however, achieved the lowest HIC value. In this case, the design of the engine hood according to this finite element model proposes to use soft material, especially in the engine hood structure to avoid or

mitigate the impact injury of the head. Among all the models, the deformation should not be significant to maintain the style of the engine hood after the collision. When the structure absorbs greater energy and then leads to decrease the acceleration of the headform and consequently the HIC value decreases. Otherwise, greater deformation is not recommended for the engine hood in this case because this will increase the acceleration when the head be in contact with the rigid bodies of the vehicle.

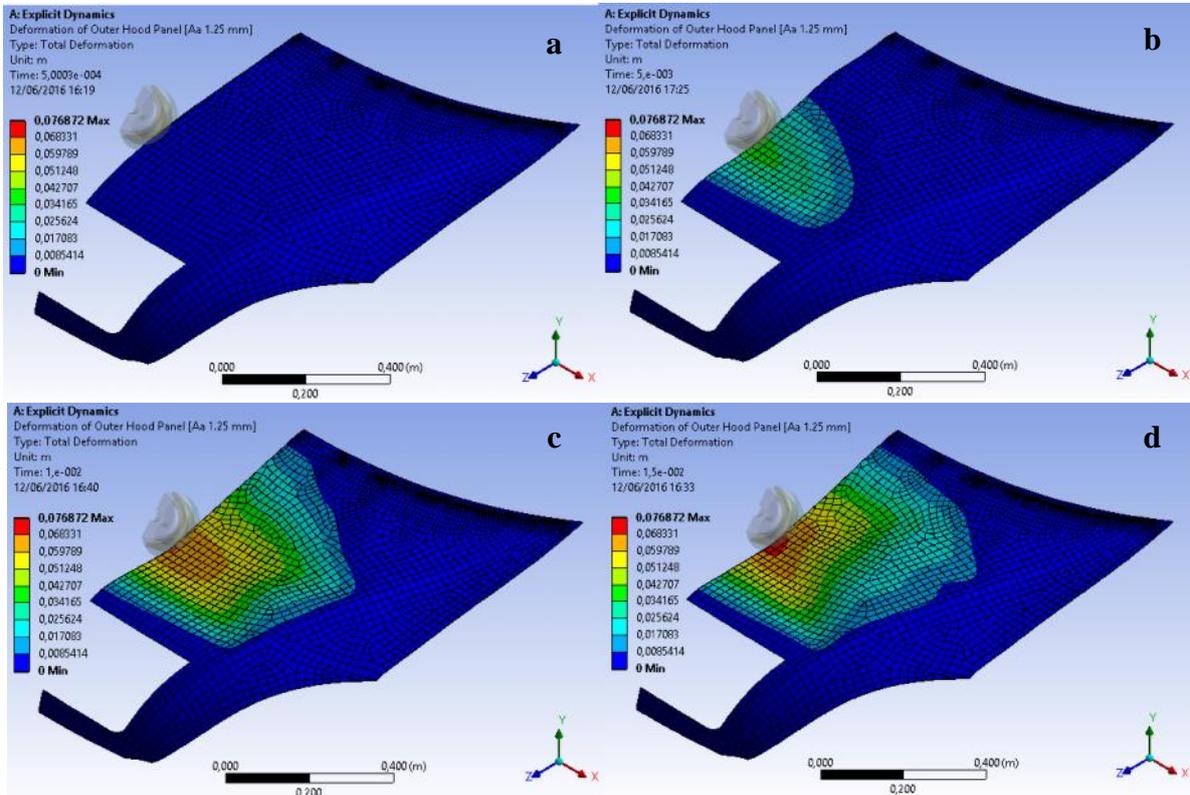


Figure 8. Deformation pattern of outer hood panel of aluminum alloy (1,25 mm) at different time in FE models

It can be seen that from Figure 9 the highest maximum deformation at 85,6 mm was belong to magnesium alloy (NL) (1,25 mm). It mean that, this material properties has lowest density and highest ductility from all, therefore it can absorb more impact energy which occuring at collision and can be minimized HIC value. Otherwise, from Figure 9 the lowest maximum deformation at 51,5 mm was belong to structural steel (1,50 mm). For more result of other maximum deformations can be seen in Table 6. It mean that, this material properties has highest density and lowest ductility from all, so it can not absorb more impact energy which occuring at collision and can produce highest HIC value (more see Figure 13).

Moreover, this research in line with Masoumi [5] reported aluminum bonnet has more displacement than steel. This means that aluminum has better crashworthiness regarding to its light weight. In addition from other researchers, Ahmed and Wei [2] had investigated composite laminate and sandwich structure materials for engine hood found that composite laminate $[0/90, \pm 45]_2$ had higher deformation than sandwich structure $[[0/90, \pm 45]_2 0/90, \text{Core}, [0/90]_4]$ were 219,3 mm and 84,7 mm respectively.

Although the intense of collision is crucial, but the displacement of head is also important which may lead to extreme acceleration in the second impact, or rebound. It means that this structure not only must be strengthened in front of static and dynamic forces such as aerodynamic, slam and dent, it also should be able to reduce the intense of impact and avoid extra deformation of hood.

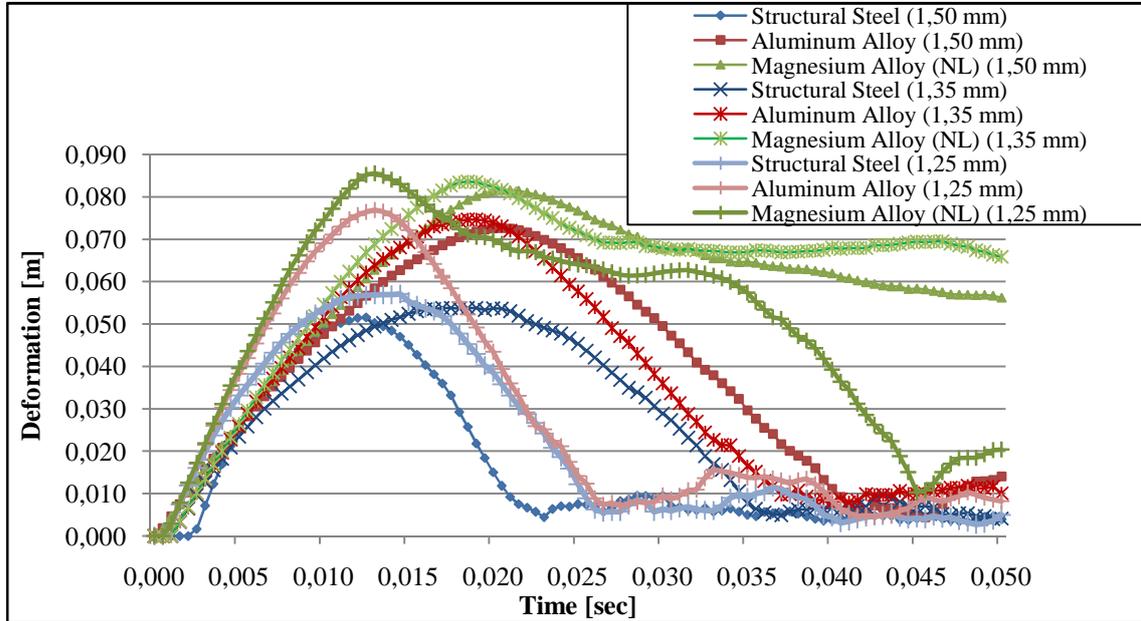


Figure 9. Comparison of outer hood panel deformation vs. time of three difference materials with 1,25 mm, 1,35 mm and 1,50 mm thicknesses

The deformation was observed, however, greater displacement is not recommended due to more modifications are needed for the hood structure and materials properties. In addition, soft structure and new composite materials are required to reduce the head injury at collision. Accordingly, the design of rigid bodies which located under hood is recommended to be at an acceptable distance to maintain the style of the engine hood and control the deformation at collision.

Table 6. The maximum deformation of outer hood panels in the collision with child headform impactor.

Hood Thickness	1,25 mm	1,35 mm	1,50 mm
Materials			
Structural Steel	57,1 mm	53,8 mm	51,5 mm
Aluminum Alloy	76,9 mm	74,6 mm	72,6 mm
Magnesium Alloy (NL)	85,6 mm	83,6 mm	81,6 mm

Equivalent (Von-Misses) Stress

Engine hood design can not only consider the pedestrian protection performance but also robustness. Some photos of the stress distribution of aluminum alloy (1,25 mm) can be seen at Figure 10 (a), (b), (c) and (d) which were occurring in the headform impact area starting from $t = 0$ to 0,015 sec. The value of stress varied according to the design

structure (materials and thickness) and impact propagation which occur in the outer hood panel.

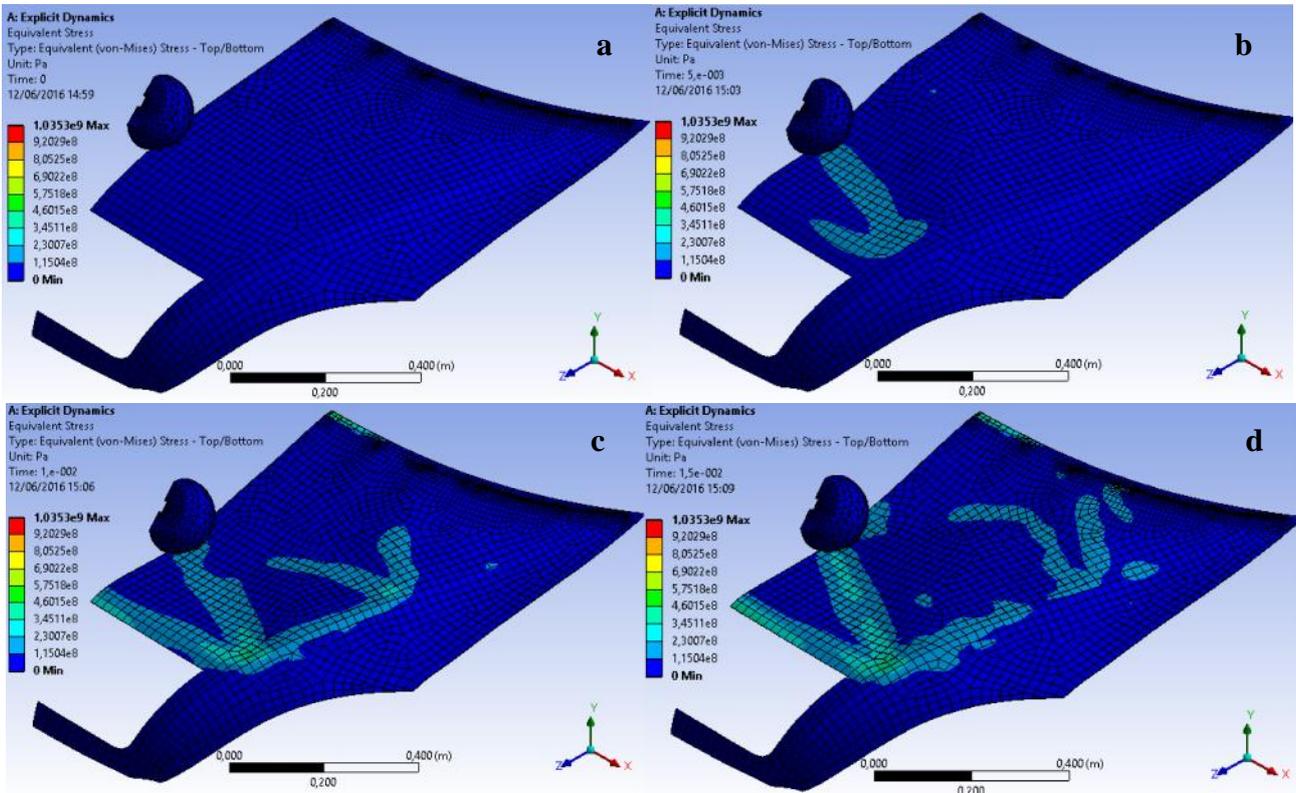


Figure 10. Equivalent (von-misses) stress of outer hood panel of aluminum alloy (1,25 mm) at different time in FE models

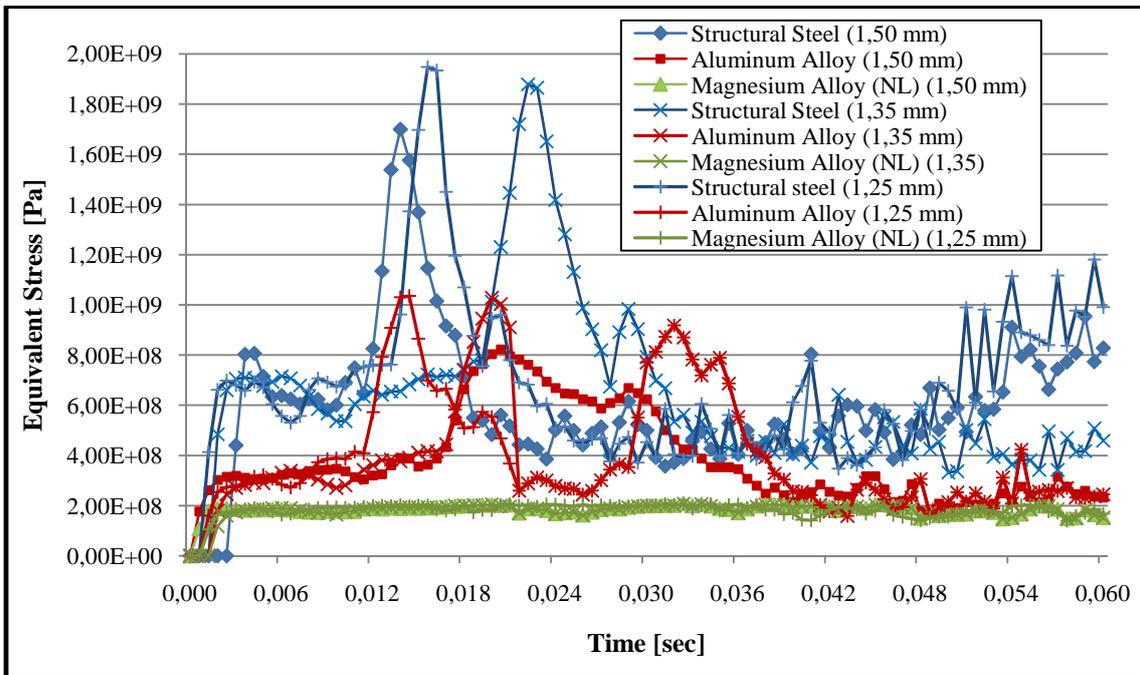


Figure 11. Comparison of equivalent stress vs. time of three difference materials with 1,25 mm, 1,35 mm and 1,50 mm thicknesses

An effective thickness of the outer hood panel and hood reinforcement for each hood structure is recommended to obtain a high level of pedestrian protection. Beside that, the strength of hood is needed to minimize head touching on rigid vehicle components while collision occurring.

From figure 11, It can be seen that the highest maximum stress of structural steel (1,25 mm) is 1,95E+09 Pa at 0,013 sec. Meanwhile, for the lowest maximum stress of magnesium alloy (1,25 mm) is 2,07E+08 Pa at 0,026 sec. Aluminum alloy has a medium maximum stress is very recommended for main hood material in order to minimize head injury and lighter than hood structure form structural steel. For more number of maximum stress can be seen at table 7. It is mean that the material properties of structural steel (1,25 mm) has the best strength from all. Otherwise, more harder material of outer hood panel can increase the number of HIC values. Masoumi et al. [5] had investigated comparison between engine hood made of composite material, steel and aluminium in terms of material cost, manufacturing cost, maximum displacement, HIC values and weight. They found that the composite materials have higher material and manufacturing costs than steel and aluminum and maximum displacement, lower HIC, and weightier than aluminum and steel.

Table 7. The maximum stress of outer hood panels in the collision with child headform impactor.

Materials	Hood Thickness		
	1,25 mm	1,35 mm	1,50 mm
Structural Steel	1,95E+09 Pa	1,88E+09 Pa	1,70E+09 Pa
Aluminum Alloy	1,04E+09 Pa	1,03E+09 Pa	8,23E+08 Pa
Magnesium Alloy (NL)	2,07E+08 Pa	2,09E+08 Pa	2,09E+08 Pa

Headform Acceleration

Actually when a vehicle is prepared to perform the pedestrian headform test in view of pedestrian safety, the effects of all components are taken into account and the HIC values in the specific points thoroughly showing the ability of vehicle for pedestrian safety and head impact. When a simplified finite element model is performed as a simulation model for evaluating the real world, HIC values lonely cannot be enough for evaluation; therefore, HIC values and displacement of headform simultaneously should be considered. As, the maximum distance between hood and the engine compartment parts could be considered less than 70 mm; therefore, displacements more than 70 mm means an extreme HIC value; however, the displacement between 50 and 70 mm is considered as critical zone, too. The HIC values were obtained by using DIAdem programming code as shown in Figure 13.

The value of headform acceleration varied according to impact duration which can be seen in Figure 12. The headform acceleration distribution on outer hood panel for aluminum alloy (1,25 mm) which was occurring when the headform touched the hood from $t = 0$ to 0,015 sec are presented in Figure 12 (a), (b), (c) and (d). The comparison among the outer hood panel thickness and materials were carried out in terms of deformation, equivalent stress and HIC value.

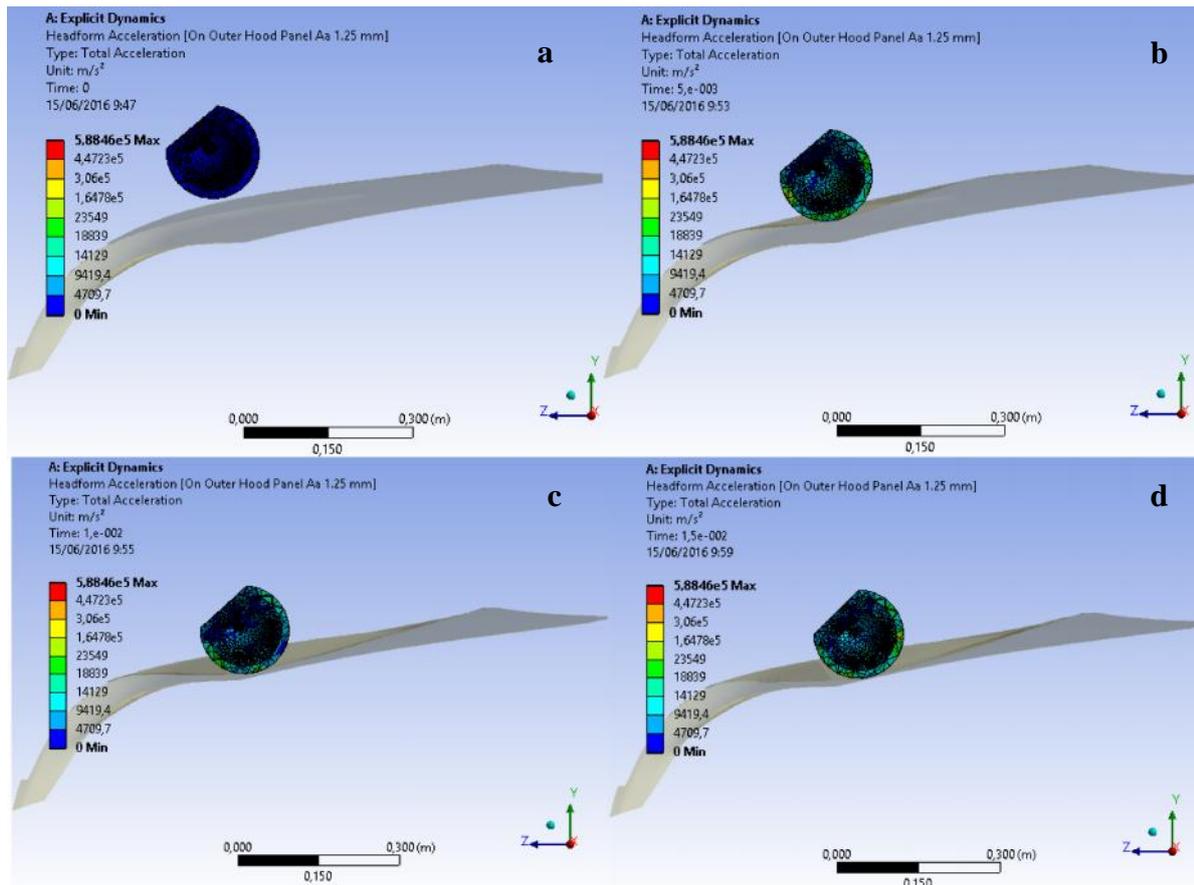


Figure 12. Headform acceleration on outer hood panel of aluminum alloy (1,25 mm) in FE model at different time

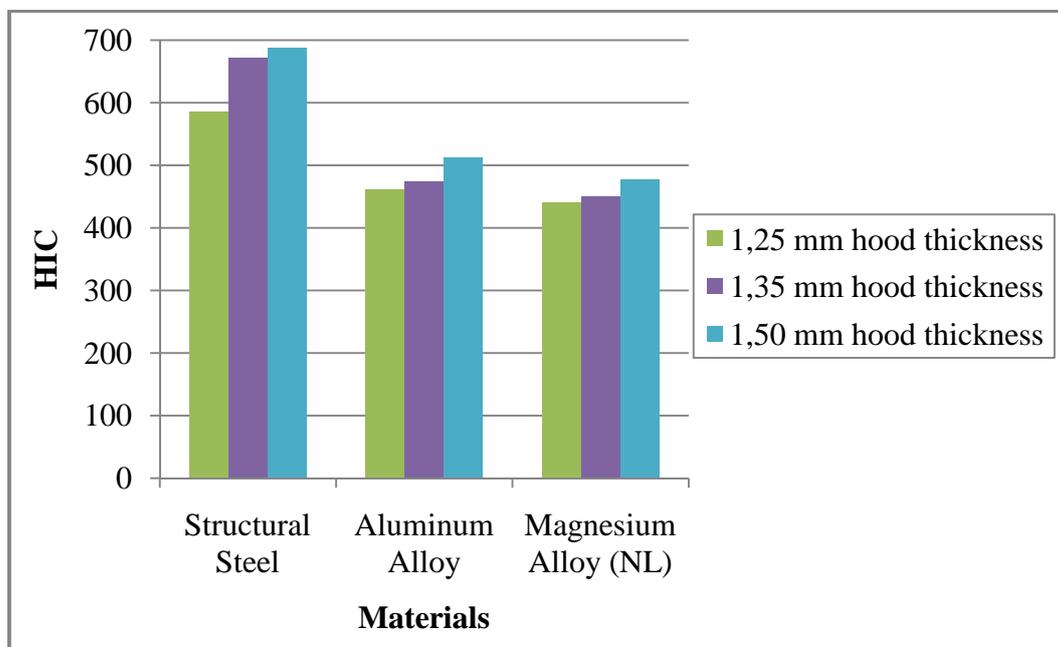


Figure 13. HIC values of the finite element modeling

From Figure 13, there are comparison of HIC value from all models. As it can be seen that outer hood panel of magnesium alloy (NL) with 1,25 mm thickness has lowest HIC value was 440. Meanwhile, it has highest deformation was 85,6 mm. Otherwise,

structural steel (1,25 mm) has the highest HIC value was 687 and in contrast has minimum deformation was 51,5 mm. It is clear that the magnesium alloy is the lightest from all models. This means that magnesium alloy has the best crashworthiness regarding to its light weight. This result was in line with previous researchers, Torkestani et al. [11] had found that increasing the thickness increases the HIC value for all the materials and it had the most effect on steel, carbon-epoxy, glass-epoxy and aluminum materials, respectively. However, it can be reported that the models achieves the basic requirements of the pedestrian safety where the HIC value should be less than 1000. In addition, all of hood models have under limit of HIC requirement, in this paper was not consider about inner structure of hood which can be important variable factor to affect HIC value.

Table 8. HIC and deformation.

Hood Models		HIC	Deformation
Structural Steel	(1,25 mm)	586	57,1 mm
Aluminum Alloy	(1,25 mm)	461	76,9 mm
Magnesium Alloy (NL)	(1,25 mm)	440	85,6 mm
Structural Steel	(1,35 mm)	672	53,8 mm
Aluminum Alloy	(1,35 mm)	474	74,6 mm
Magnesium Alloy (NL)	(1,35 mm)	451	83,6 mm
Structural Steel	(1,50 mm)	687	51,5 mm
Aluminum Alloy	(1,50 mm)	512	72,6 mm
Magnesium Alloy (NL)	(1,50 mm)	477	81,6 mm

Along with the increase of deformation, in contrast HIC is reduced, as shown in table 8. Generally, with the value increasing the hood deformation and energy absorption capability is increased, resulting in the reducing of HIC. Therefore, it could be stated that magnesium alloy (NL) requires most deformation space in comparison to structural steel and aluminum alloy to meet pedestrian head injury requirements.

CONCLUSIONS

In this study, by using finite element software certain have been designed for the compact SUV outer hoods. It was conducted in view of pedestrian safety according to the test protocols proposed by ANCAP. Child headform collision simulations were carried out on the outer hoods to determine homogeneous HIC with minimal deformation, effect hood thickness on equivalent stress and the optimum value from all models performance. Achievement of design criteria for homogeneous impact performance for the pedestrian head could aid in meeting the general design requirements.

The result from this study showed that a minimum of about 51,5 mm deformation space, but has maximum HIC about 687 were required to obtain robust and homogeneous head impact performance. Moreover, hood thickness and materials as

main factors to influence equivalent stress and HIC value. Finally, materials and thicknesses of the different models have been compared. It is shown that the pedestrian safety has greatly improved up to 29,46%. As the requirements of the friendliest car, the structure of the engine hood should be soft to absorb more energy and provide lower deformation, lower HIC and less displacement of the headform impactors. Thus, possible improvements in lower HIC and deformation could be studied, as well as materials, selection of engine hood structures should be considered in the future studies.

In conclusion, a magnesium alloy (NL) (1,25 mm) material for outer hood panels is the preferred choice for passenger vehicle hood assembly capable of meeting the HIC threshold when minimal deformation is the main performance requirement. Investigation of the effects of thickness, material and hood structure designs on the pedestrian safety, will be another issue for future researches.

REFERENCES

- [1] J. Marbun, "Indonesia Urutan Pertama Peningkatan Kecelakaan Lalu Lintas," 2014. [Online]. Available: <http://www.republika.co.id>. [Accessed: 03-Feb-2016].
- [2] A. Ahmed and L. Wei, "Thin-Walled Structures Introducing CFRP as an alternative material for engine hood to achieve better pedestrian safety using finite element modeling," *Thin Walled Struct.*, vol. 99, pp. 97–108, 2016.
- [3] J. Huang, Z. Liu, and Y. Long, "A Numerical Investigation of a Novel Hood Design for Pedestrian Protection," pp. 872–878, 2014.
- [4] S. Min, H. Kim, S.-W. Chae, and J. Hong, "Design method of a hood structure adopting modal analysis for preventing pedestrian's head injury," *Int. J. Precis. Eng. Manuf.*, vol. 17, no. 1, pp. 19–26, 2016.
- [5] A. Masoumi, M. Hassan, and A. Najibi, "Comparison of steel , aluminum and composite bonnet in terms of pedestrian head impact," *Saf. Sci.*, vol. 49, no. 10, pp. 1371–1380, 2011.
- [6] H. M. Samaka and F. Tarlochan, "Building And Performance Validating Of Adult Pedestrian Finite Element Head Model To Evaluate The Car Hood Design," vol. 2, no. 7, pp. 44–49, 2013.
- [7] A. D. Anggono, T. W. B. Riyadi, and W. A. Siswanto, "Dynamic Explicit Finite Element Code for U-Bending Simulation and Springback Prediction," *Appl. Mech. Mater.*, vol. 660, no. August, pp. 337–341, 2014.
- [8] R. Krishnamoorthy, M. Takla, A. Subic, and D. Scott, "Design Optimisation of Passenger Car Hood Panels for Improved Pedestrian Protection," vol. 633, pp. 62–76, 2013.
- [9] C. Cruz, PM; Vinyals, J., "Validation of FE-models of pedestrian protection impactor," 2004.
- [10] M. H. Shojaeefard, A. Najibi, and M. R. Ahmadabadi, "Thin-Walled Structures Pedestrian safety investigation of the new inner structure of the hood to mitigate the impact injury of the head," *Thin Walled Struct.*, vol. 77, pp. 77–85, 2014.
- [11] A. Torkestani, M. Sadighi, and R. Hedayati, "Thin-Walled Structures Effect of material type , stacking sequence and impact location on the pedestrian head injury in collisions," *Thin Walled Struct.*, vol. 97, pp. 130–139, 2015.